



Filtek Solutions

Design, manufacture & sales of EMC components


A range of feedthrough pi filters in metric thread bushings.

Resin sealed at both ends.

Nail head lead wire

Other capacitance values, voltage ratings & thread sizes are available upon request.

Pi Circuit Feedthrough Filters, Metric Thread

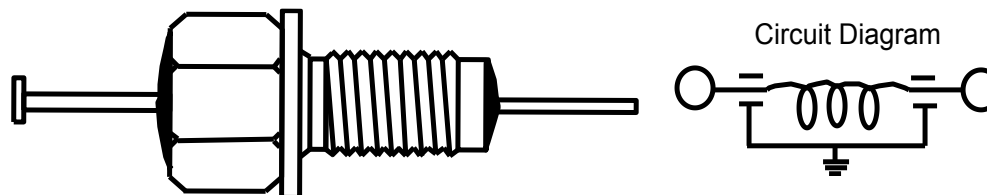

Capacitance (min pF)	Thread	Part Number (click p/n for datasheet)	Rated Voltage at 85°C (VDC)	Current Amps DC	Insertion Loss (dB) 10MHz	Insertion Loss (dB) 100MHz	Insertion Loss (dB) 1GHz	Insertion Loss (dB) 10GHz
1500	M3.5 X 0.6	FS-P1500-M3.5	350	10	5	40	60	60
3000	M3.5 X 0.6	FS-P3000-M3.5	200	10	8	50	70	70
1500	M4 X 0.5	FS-P1500-M4	350	10	5	45	65	60
4000	M4 X 0.5	FS-P4000-M4	200	10	10	50	65	70
1500	M5 X 0.8	FS-P1500-M5	500	10	5	45	70	70
3000	M5 X 0.8	FS-P3000-M5	300	10	20	60	70	70
5000	M5 X 0.8	FS-P5000-M5	300	10	25	65	70	70
1500	M6 X 0.75	FS-P1500-M6	500	10	5	45	70	70
3000	M6 X 0.75	FS-P3000-M6	300	10	20	60	70	70
5500	M6 X 0.75	FS-P5500-M6	300	10	20	68	70	70