



Filtek Solutions

Design, manufacture & sales of EMC components


Pi Circuit Feedthrough Filters, Imperial Thread

A range of feedthrough pi filters in imperial threaded bushings.

Resin sealed at both ends.

Nail head lead wire

Other capacitance values, voltage ratings & thread sizes are available upon request.

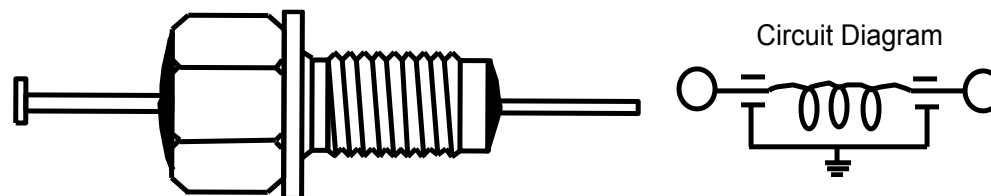

Capacitance (min pF)	Thread	Part Number (click p/n for datasheet)	Rated Voltage at 85°C (VDC)	Current Amps DC	Insertion Loss (dB) 10MHz	Insertion Loss (dB) 100MHz	Insertion Loss (dB) 1GHz	Insertion Loss (dB) 10GHz
1500	6-40-UNF-2A	FS-P1500-A	350	10	5	40	60	60
3000	6-40-UNF-2A	FS-P3000-A	200	10	8	50	70	70
1500	8-32-UNC-2A	FS-P1500-B	350	10	5	45	65	60
4000	8-32-UNC-2A	FS-P4000-B	200	10	10	50	65	70
1500	12-32-UNEF-2A	FS-P1500-C	500	10	5	45	70	70
3000	12-32-UNEF-2A	FS-P3000-C	300	10	20	60	70	70
5000	12-32-UNEF-2A	FS-P5000-C	300	10	25	65	70	70
1500	12-28UNF-2A	FS-P1500-D	500	10	5	45	70	70
5500	12-28UNF-2A	FS-P5500-D	300	10	20	68	70	70
1500	2BA	FS-P1500-E	500	10	5	45	70	70
3000	2BA	FS-P3000-E	300	10	20	60	70	70